


PERFORMANCE V620 USER MANUAL

Please read this manual throughly before using and keep it for future reference.

PACKING LIST



PERFORMANCE V620



Remote
(Batteries Not Included)




Carrying Bag




User Manual



AV Cable




HD Cable




Power Cable

NOTICE







Recommended

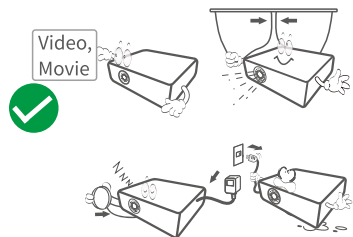


NOT Recommended

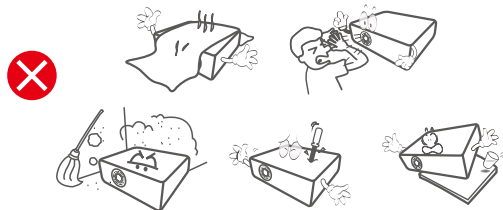


FUNCTION OVERVIEW

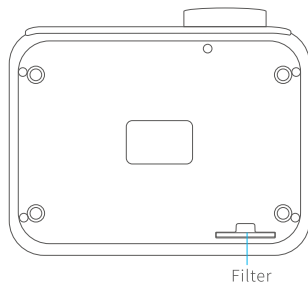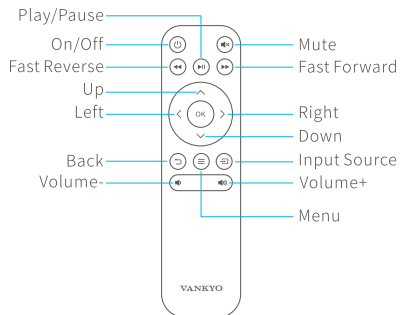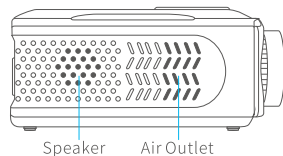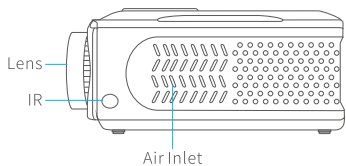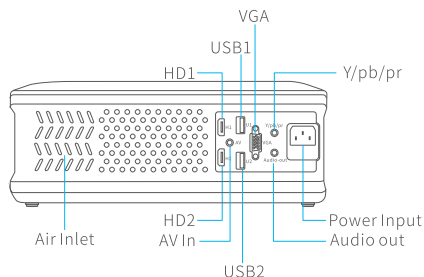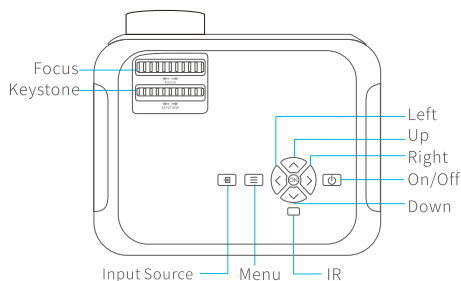


QUICK START




Plug the power cord into an outlet.




Take off the lens cover.




Press the power button to turn on the projector.




Select the correct input source to project your device.

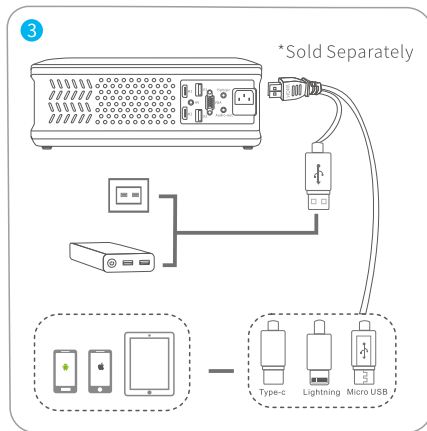


Connect your device to the projector correctly.



Adjust the kickstand accordingly.

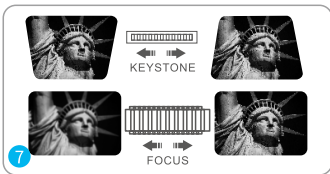


Adjust the keystone and focus ring to get the best image performance.




Press the power button twice to turn off the projector.

INPUT SOURCE


Press  button on the projector or remote to enter the interface of Input Source.

A.VGA Connection

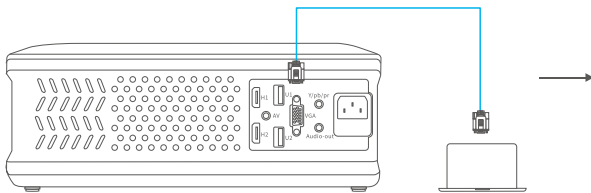


Input Source
AV
YPbPr
H1
H2
VGA
U1
U2

B.USB Connection

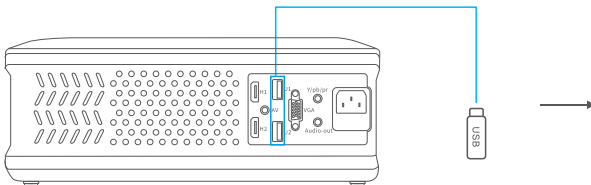



Input Source
AV
YPbPr
H1
H2
VGA
U1
U2

C.HD Connection

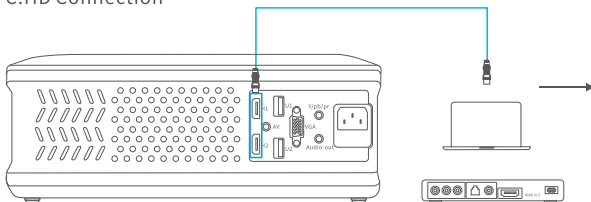


Input Source
AV
YPbPr
H1
H2
VGA
U1
U2

PROJECTOR CONNECTION

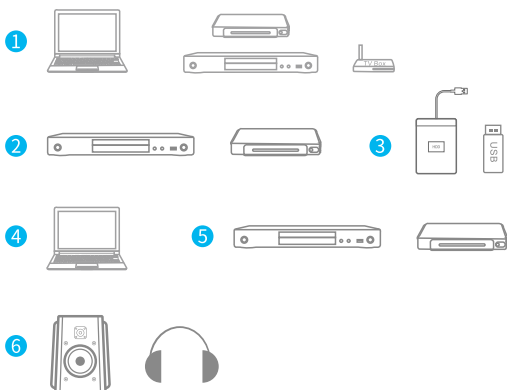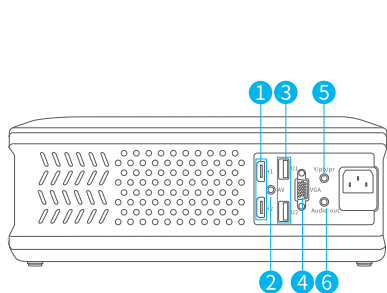

PROJECTION DISTANCE&SIZE

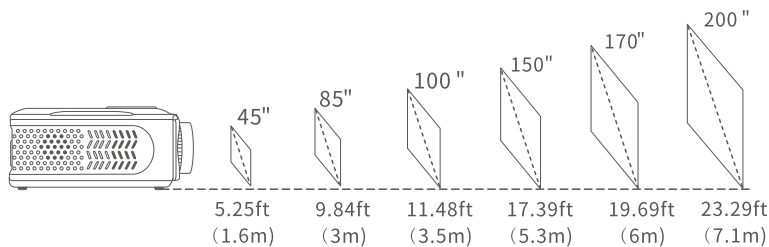

The recommended projection screen is around 85 inches with a projection distance of around 9.84ft. Ambient darkness will improve the clarity of the projected images.

SPECIFICATION

Display Technology	LCD	Light Source	LED
Resolution	Native 1920 x 1080	Input Signal	576i/720P/1080i/1080P
Installation Type	Front/Rear/Ceiling	Aspect Ratio	4:3/16:9/Auto
Focus	Manual	Keystone	±15°
Speaker	3W/4ohm	Power Supply	AC 100-240V, 50/60Hz
Unit Dimension	320 x 260 x 120mm (12.6 x 10.2 x 4.7in)	Unit Net Weight	2.56kg(5.6lb)
Photo Format Supported	BMP/JPG/JPEG/PNG/TIF/GIF	Audio Format Supported	MP3/WMA/M4A/AAC/WAV
Video Format Supported	AVI/MP4/DIV/MOV/MKV/ WSF/ASF/FLV/WMV/ASM/ 3GP/3G2/WMV/H264	Ports	YPbPr x 1/U2.0 Port x 2/VGA Port x 1/ AV In x 1/Audio out x 1/HD In x 2
Mounting Screws	M4 Metric	Number of Screws	4

TROUBLESHOOTING GUIDE

1. Blurry Image

- * Adjust focus ring/keystone.
- * Projector and screen/wall must be in effective distance.

2. Remote Unresponsive

- * Make sure remote points at IR receiver directly.
- * Do not cover IR receiver.
- * Try a new pair of AAA batteries.

3. Mobile Connection

iOS: Genuine lightning to HDMI cable.

Android: Micro USB to HDMI adapter/Type C to HDMI cable.

4. Upside Down Images

Go to **Menu > PICTURE > Projection Mode** to flip the projection image.

CAUTION



The symbol indicates AC voltage



RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.

VANKYO SUPPORT



www.ivankyo.com



[@VankyoOfficial](https://www.facebook.com/VankyoOfficial)



[VANKYO](https://www.youtube.com/VANKYO)

North America support@ivankyo.com

United Kingdom support.uk@ivankyo.com

Deutschland support.de@ivankyo.com

France support.fr@ivankyo.com

España support.es@ivankyo.com

Italia support.it@ivankyo.com

日本 support.jp@ivankyo.com

